




Vyvíjač pary GMT

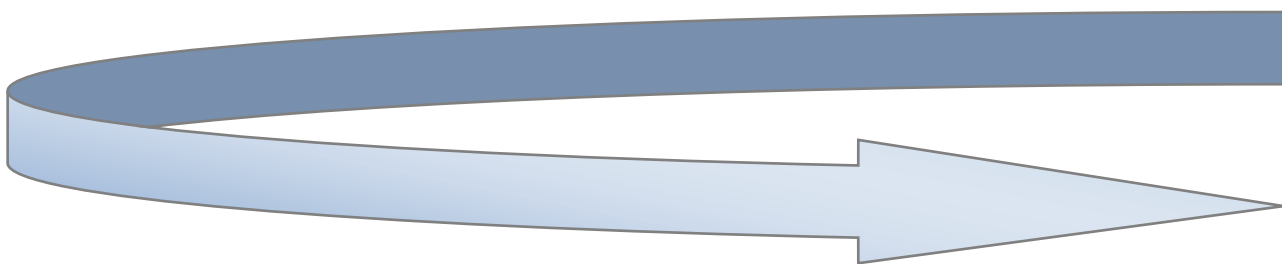

Technické údaje:

Garioni Naval typ:	parný výkon kg/h	tepelný výkon kW	tlak pary max. *bar	• dĺžka mm	• šírka mm	• výška mm	dymovod mm	□ hmotnosť kg
GMT 12	120	84	11,76	1.700	1.450	1.600	Ø 200	750
GMT 20	200	140	11,76	1.700	1.450	1.600	Ø 200	750
GMT 30	300	209	11,76	1.700	1.450	1.600	Ø 200	750
GMT 40	400	279	11,76	1.700	1.450	1.700	Ø 200	850
GMT 50	500	349	11,76	1.700	1.450	1.700	Ø 200	850
GMT 60	600	419	11,76	2.300	1.650	1.650	Ø 250	1.250
GMT 80	800	558	11,76	2.300	1.650	1.650	Ø 250	1.250
GMT 100	1.000	698	11,76	2.300	1.650	1.650	Ø 250	1.350
GMT 120	1.200	837	11,76	2.300	1.650	1.650	Ø 250	1.350
GMT 150	1.500	1.047	11,76	3.300	1.750	2.000	Ø 350	1.800
GMT 180	1.800	1.256	11,76	3.350	1.750	2.100	Ø 350	2.100
GMT 200	2.000	1.396	11,76	3.375	1.750	2.100	Ø 350	2.100
GMT 250	2.500	1.745	11,76	3.700	1.750	2.200	Ø 450	2.800
GMT 300	3.000	2.093	11,76	4.100	1.750	2.200	Ø 450	2.900
GMT 400	4.000	2.791	12,00	4.400	2.100	2.200	Ø 550	3.750
GMT 500	5.000	3.489	12,00	4.750	2.550	2.700	Ø 550	6.600
GMT 600	6.000	4.187	12,00	5.150	2.500	2.600	Ø 550	7.000
GMT 700	7.000	4.885	12,00	5.400	2.800	2.850	Ø 650	7.700
GMT 800	8.000	5.582	12,00	5.700	2.850	2.900	Ø 700	9.000

poznámky:

- * na vyžiadanie tlak pary až do 100 bar
- orientačné rozmery (dĺžka bez horáku)
- čistá hmotnosť bez vody a horáku