




## Vyvíjač pary GMT

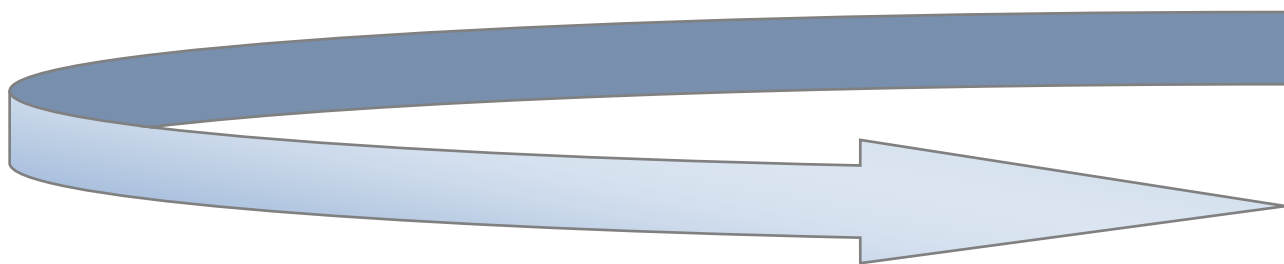

### Technické údaje:

Garioni Naval typ:	parný výkon kg/h	tepelný výkon kW	tlak pary max. *bar	• dĺžka mm	• šírka mm	• výška mm	dymovod mm	□ hmotnosť kg
<b>GMT 12</b>	120	84	11,76	1.700	1.450	1.600	Ø 200	750
<b>GMT 20</b>	200	140	11,76	1.700	1.450	1.600	Ø 200	750
<b>GMT 30</b>	300	209	11,76	1.700	1.450	1.600	Ø 200	750
<b>GMT 40</b>	400	279	11,76	1.700	1.450	1.700	Ø 200	850
<b>GMT 50</b>	500	349	11,76	1.700	1.450	1.700	Ø 200	850
<b>GMT 60</b>	600	419	11,76	2.300	1.650	1.650	Ø 250	1.250
<b>GMT 80</b>	800	558	11,76	2.300	1.650	1.650	Ø 250	1.250
<b>GMT 100</b>	1.000	698	11,76	2.300	1.650	1.650	Ø 250	1.350
<b>GMT 120</b>	1.200	837	11,76	2.300	1.650	1.650	Ø 250	1.350
<b>GMT 150</b>	1.500	1.047	11,76	3.300	1.750	2.000	Ø 350	1.800
<b>GMT 180</b>	1.800	1.256	11,76	3.350	1.750	2.100	Ø 350	2.100
<b>GMT 200</b>	2.000	1.396	11,76	3.375	1.750	2.100	Ø 350	2.100
<b>GMT 250</b>	2.500	1.745	11,76	3.700	1.750	2.200	Ø 450	2.800
<b>GMT 300</b>	3.000	2.093	11,76	4.100	1.750	2.200	Ø 450	2.900
<b>GMT 400</b>	4.000	2.791	12,00	4.400	2.100	2.200	Ø 550	3.750
<b>GMT 500</b>	5.000	3.489	12,00	4.750	2.550	2.700	Ø 550	6.600
<b>GMT 600</b>	6.000	4.187	12,00	5.150	2.500	2.600	Ø 550	7.000
<b>GMT 700</b>	7.000	4.885	12,00	5.400	2.800	2.850	Ø 650	7.700
<b>GMT 800</b>	8.000	5.582	12,00	5.700	2.850	2.900	Ø 700	9.000

**poznámky:**

- \* na vyžiadanie tlak pary až do 100 bar
- orientačné rozmery ( dĺžka bez horáku )
- čistá hmotnosť bez vody a horáku